
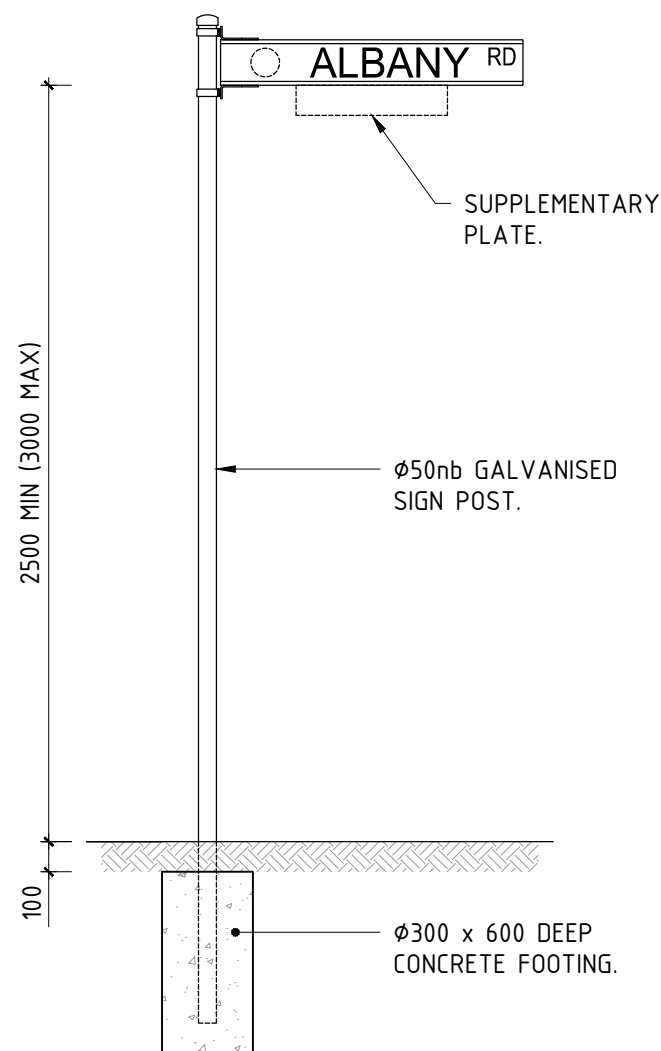
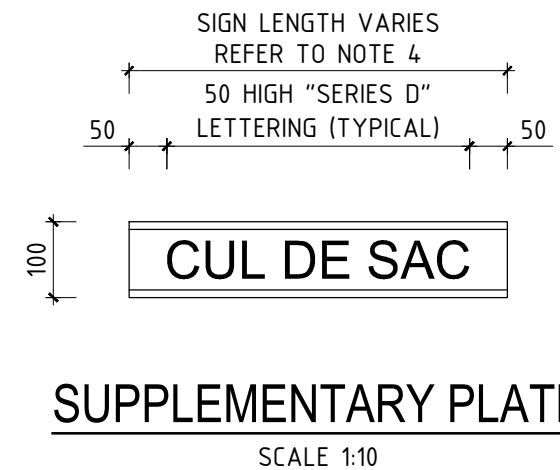


CITY OF ALBANY ENGINEERING SERVICES

STANDARD CONSTRUCTION DRAWINGS


<u>CATEGORY</u>	<u>DRAWING No.</u>	<u>DRAWING TITLE</u>	<u>REVISION</u>
DRAINAGE	STD-01-01	TYPICAL MANHOLE	REV 0
	STD-01-02	UNIVERSAL SIDE ENTRY PIT	REV 0
	STD-01-03	COMBINATION SIDE ENTRY PIT	REV 0
	STD-01-04	GRATED GULLY PIT	REV 0
	STD-01-05	HOUSE CONNECTION PIT	REV 0
	STD-01-06	UNDERGROUND STORAGE PIT	REV 0
	STD-01-07	KERB OUTLET	REV 0
KERBING	STD-02-01	TYPE 1 KERB PROFILES	REV 0
	STD-02-02	TYPE 2 KERB PROFILES	REV 0
	STD-02-03	TYPE 3 KERB PROFILES	REV 0
	STD-02-04	CONCRETE APRON	REV 0
PATHWAYS	STD-03-01	CONCRETE PATHWAY DETAILS	REV 0
	STD-03-02	ASPHALT PATHWAY DETAILS	REV 0
	STD-03-03	PEDESTRIAN RAMP - TYPE 1	REV 0
	STD-03-04	PEDESTRIAN RAMP - TYPE 2	REV 0
SIGNS	STD-04-01	STREET NAME SIGNS	REV 0
CROSSOVERS	STD-05-01	STANDARD CROSSOVER - CONCRETE	REV 0
	STD-05-02	STANDARD CROSSOVER - ASPHALT	REV 0
	STD-05-03	STANDARD CROSSOVER - PAVED	REV 0

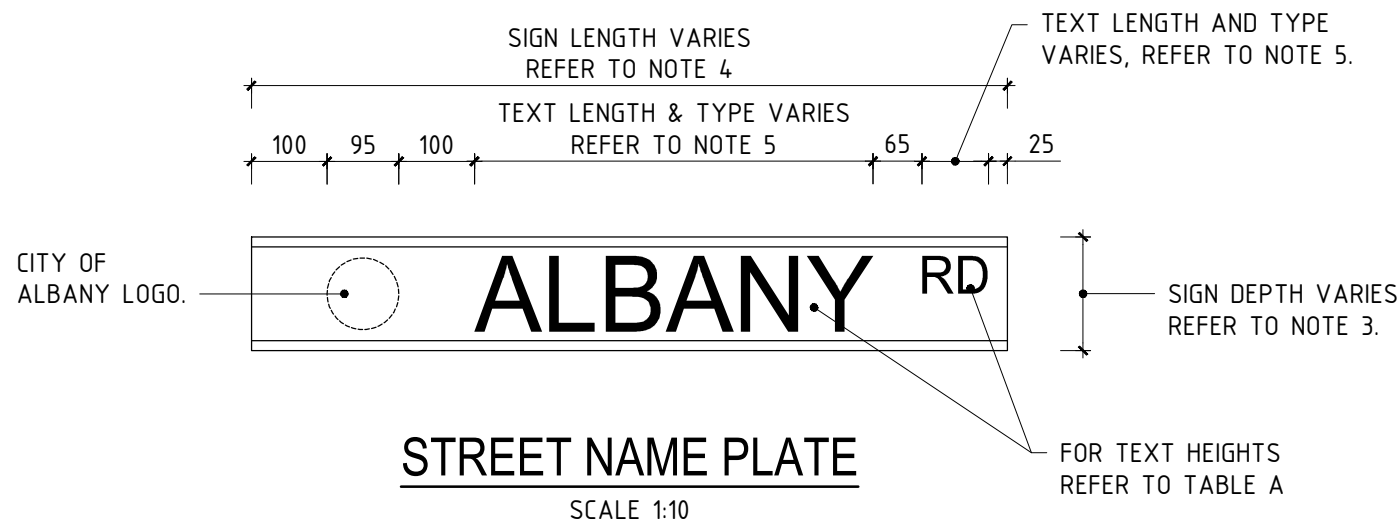

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE SHOWN.
2. ALL SIGN PLATES SHALL BE CONSTRUCTED FROM NON-CORROSIVE ALUMINIUM EXTRUSIONS WITH A THICKNESS OF NO LESS THAN 3mm. SIGNS SHALL BE RECTANGULAR WITH THE LONG AXIS HORIZONTAL. WORDS SHALL BE WRITTEN HORIZONTALLY. ENDS SHALL BE CUT SQUARE.
3. MINIMUM DEPTH OF SIGNBOARD TO BE 150mm ON ROADS WHERE SPEEDS ARE LESS THAN 70km/h. WHERE SPEEDS ARE GREATER A MINIMUM DEPTH OF 200mm IS TO BE USED.
4. THE MINIMUM LENGTH OF STREET NAME SIGNS SHALL BE 500mm AND THE MAXIMUM LENGTHS SHALL BE, 1200mm FOR SINGLE POST END-MOUNTED, 1800mm FOR CENTRE-MOUNTED AND 2000mm FOR TWO-POST MOUNTED.
5. LETTERS FOR THE STREET NAME AND ALL LEGENDS ON THE SUPPLEMENTARY PLATES SHALL BE SERIES D, AS SPECIFIED IN AS 1744, EXCEPT THAT WHERE THIS WOULD OTHERWISE RESULT IN AN OVERLENGTH SIGN, THE SIGN SHALL NOT BE LENGTHENED BUT THE LETTERING MAY BE MADE PROPORTIONALLY NARROWER TO FIT THE AVAILABLE LENGTH. LETTERS SHALL BE NOT BE NARROWER THAN SERIES C.
6. SIGN COLOUR CODE SHALL BE BLACK LETTERING ON A WHITE REFLECTIVE BACKGROUND. MIN DEPTH OF REFLECTORIZED SECTION OF THE SIGN SHALL BE AT LEAST 130mm.
7. SIGNS TO BE FIXED TO STREET LIGHTS OR POLES WHERE POSSIBLE.

TRAFFIC SPEED	STREET NAME LETTER HEIGHT	STREET TYPE LETTER HEIGHT
LESS THAN 70km/h	100	50
GREATER THAN 70km/h	130	65

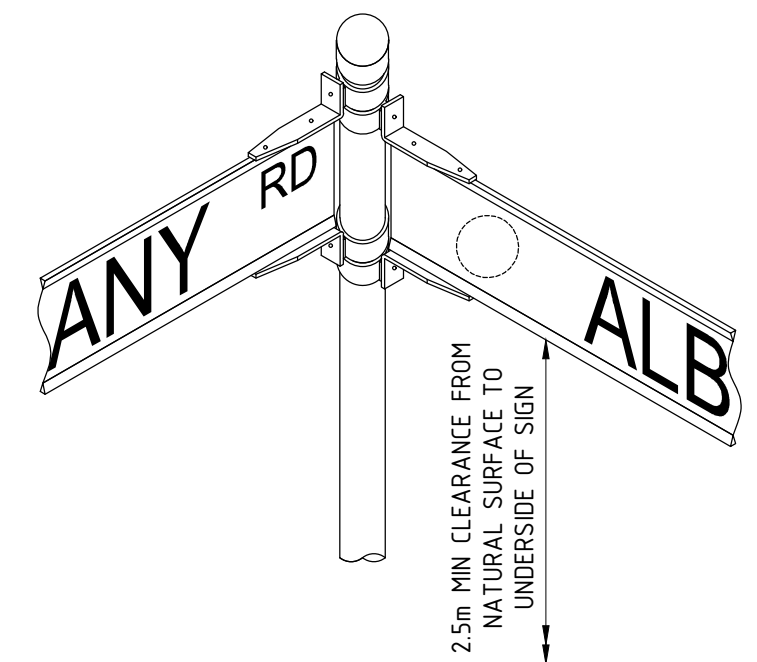

REV	DESCRIPTION	APPROVED	DATE
0	APPROVED	DK	26/06/18



102 NORTH ROAD, YAKAMIA WA 6330
 PO BOX 484 ALBANY WA 6331
 Tel: (08) 9841 9333
 Fax: (08) 9841 4099
 Email: cityassets@albany.wa.gov.au
 Website: www.albany.wa.gov.au

APPROVED

AUTHORISED: DESIGNED: DRAWN: JLP

THIS DRAWING IS NOT TO BE USED FOR CONSTRUCTION UNLESS SIGNED AS APPROVED

PROJECT					
CITY OF ALBANY ENGINEERING SERVICES STANDARD CONSTRUCTION DRAWINGS					
DRAWING NAME					
STREET NAME SIGNS					
DRAWING No	FILE REF	JOB No	SCALE	SHEET No	REV
-	-	-	1:25 @ A3	STD-04-01	0